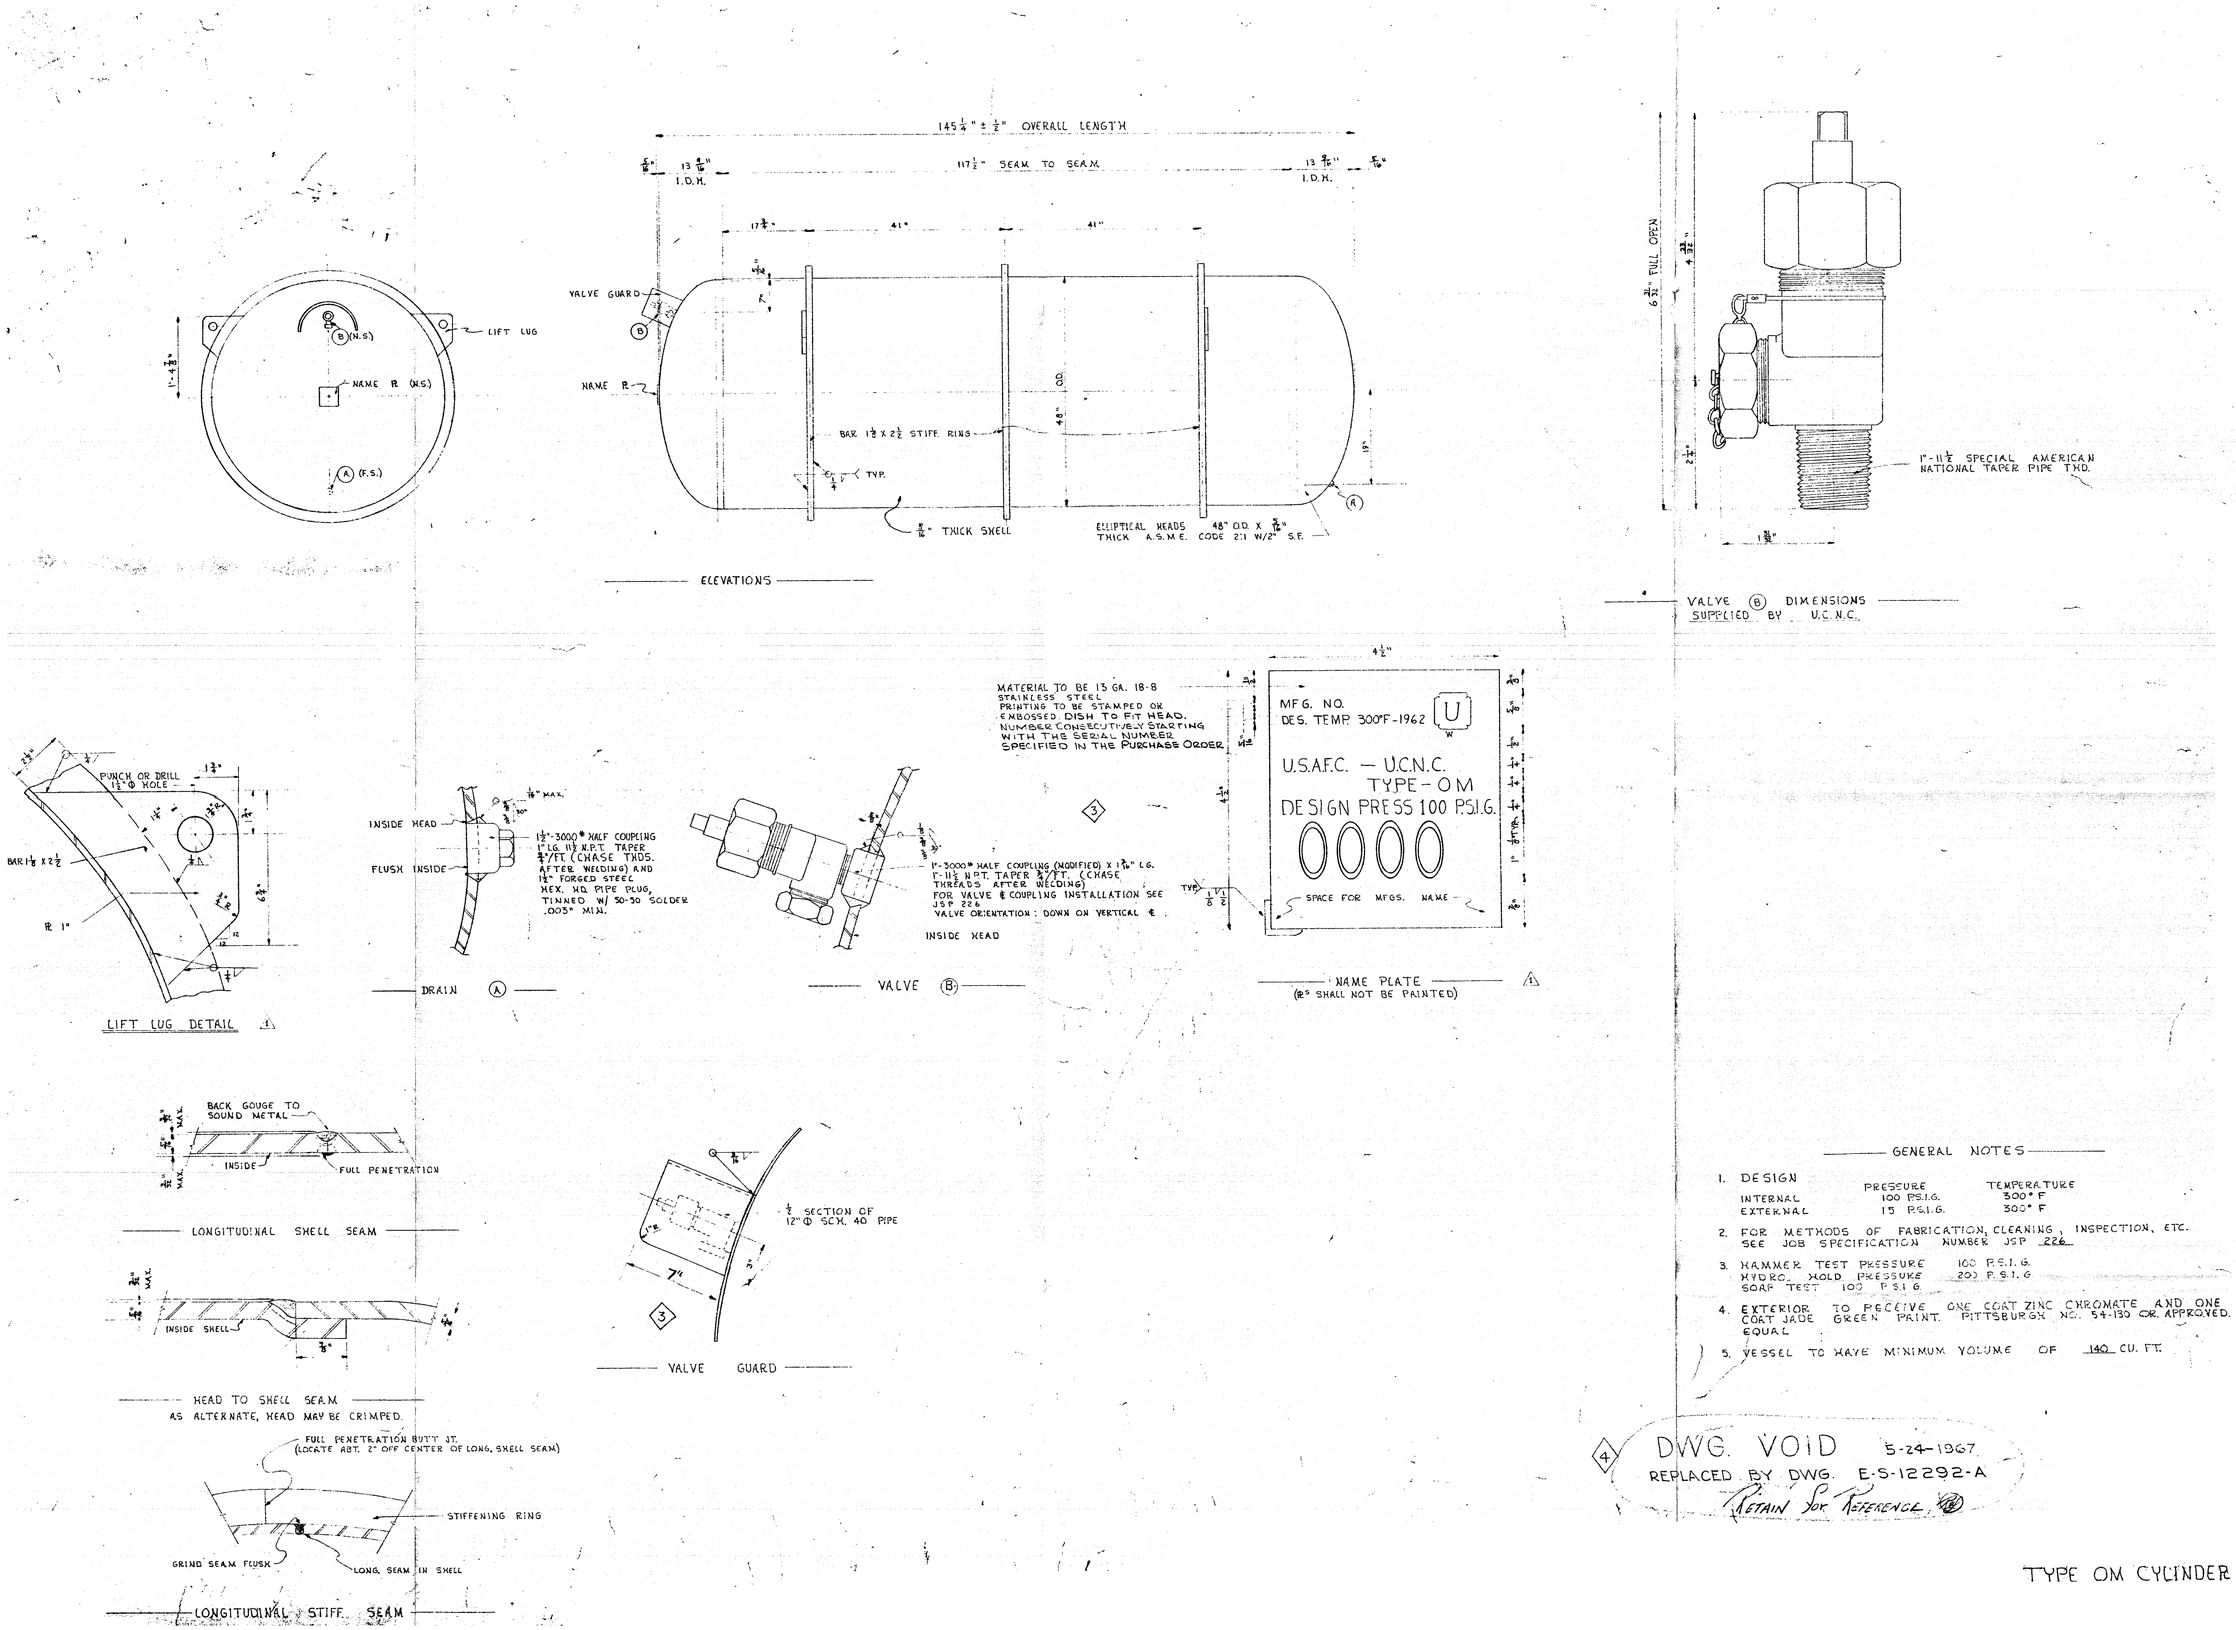

GENERAL NOTES

1. DESIGN

	PRESSURE	TEMPERATURE
INTERNAL	100 P.S.I.G.	300° F
EXTERNAL	15 P.S.I.G.	300° F

2. FOR METHODS OF FABRICATION, CLEANING, INSPECTION, ETC. SEE JOB SPECIFICATION NUMBER JSP 226
3. HAMMER TEST PRESSURE 100 P.S.I.G.
   HYDRO. HOLD PRESSURE 200 P.S.I.G.
   SOAP TEST 100 P.S.I.G.
4. EXTERIOR TO RECEIVE ONE COAT ZINC CHROMATE AND ONE COAT JADE GREEN PAINT. PITTSBURGH NO. 54-130 OR APPROVED. EQUAL
5. VESSEL TO HAVE MINIMUM VOLUME OF 140 CU. FT.

4 DWG. VOID 5-24-1967
REPLACED BY DWG. E-S-12292-A
RETAIN FOR REFERENCE

TYPE OM CYLINDER