Unclassified

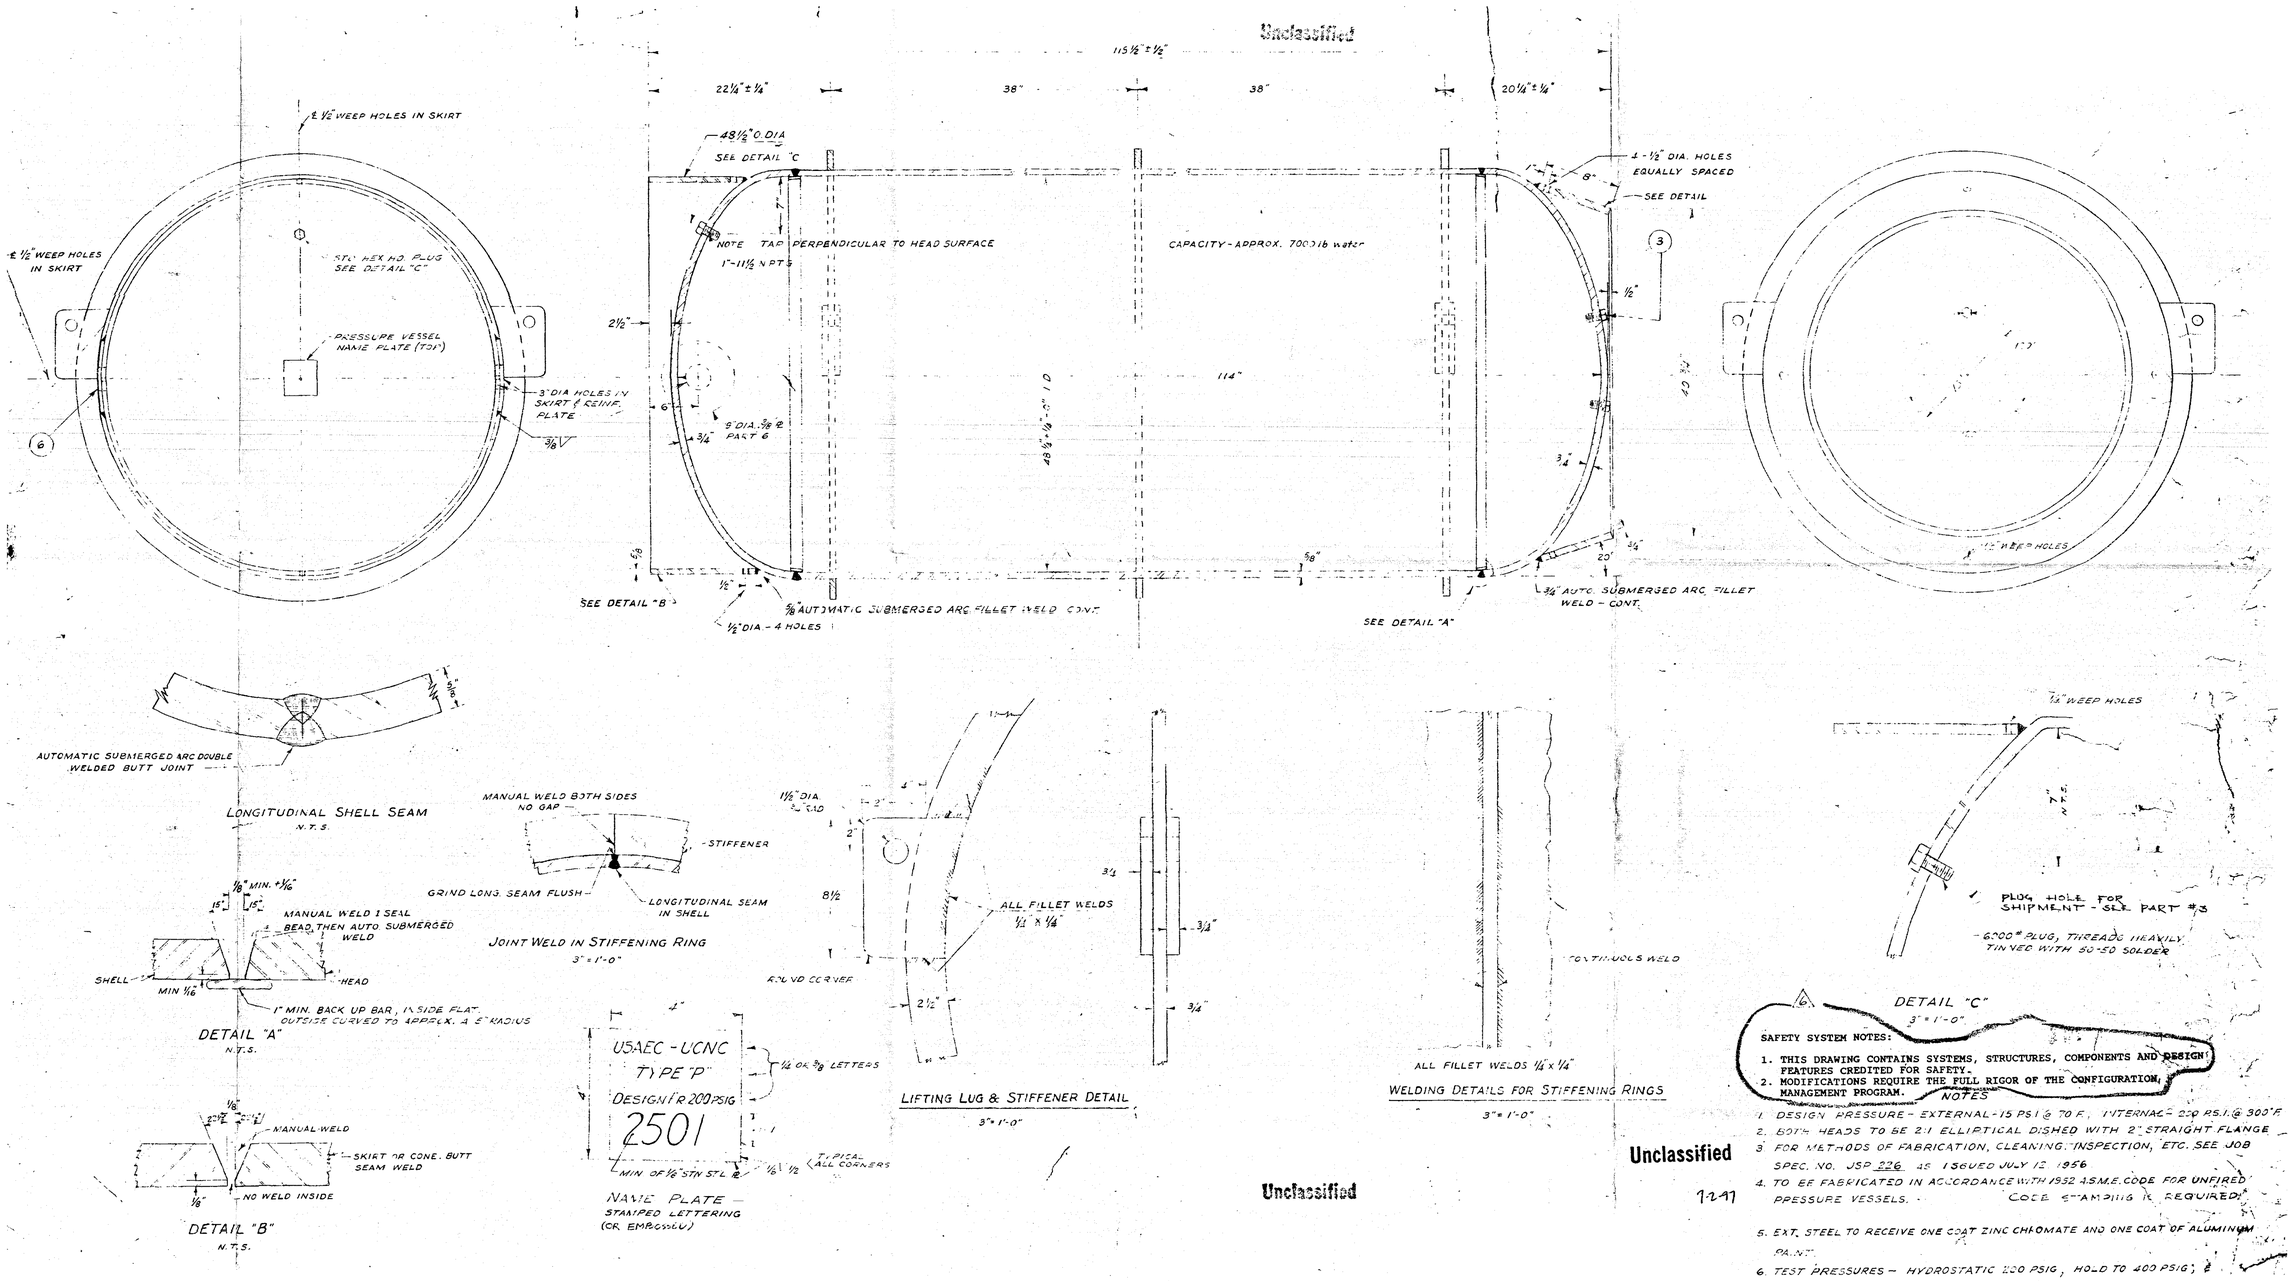

Unclassified

Unclassified

SAFETY SYSTEM NOTES:

1. THIS DRAWING CONTAINS SYSTEMS, STRUCTURES, COMPONENTS AND DESIGN FEATURES CREDITED FOR SAFETY.
2. MODIFICATIONS REQUIRE THE FULL RIGOR OF THE CONFIGURATION MANAGEMENT PROGRAM.

NOTES

1. DESIGN PRESSURE - EXTERNAL - 15 PSI @ 70 F, INTERNAL - 200 PSI @ 300°F
2. BOTH HEADS TO BE 2:1 ELLIPTICAL DISHED WITH 2" STRAIGHT FLANGE
3. FOR METHODS OF FABRICATION, CLEANING, INSPECTION, ETC. SEE JOB SPEC. NO. JSP 226 AS ISSUED JULY 12 1956
4. TO BE FABRICATED IN ACCORDANCE WITH 1952 A.S.M.E. CODE FOR UNFIRED PRESSURE VESSELS. CODE STAMPING IS REQUIRED.
5. EXT. STEEL TO RECEIVE ONE COAT ZINC CHROMATE AND ONE COAT OF ALUMINUM PAINT
6. TEST PRESSURES - HYDROSTATIC 300 PSIG, HOLD TO 400 PSIG; & AIR 200 PSIG.
7. VESSEL TO HAVE MIN. VOLUME OF 111 CU. FT.
8. ACCEPTABLE REPLACEMENTS PARTS:

VALVE	EQUIPMENT SPECIFICATION JSP-532
PLUG	DRAWING MSE-16092-A
VALVE GUARD	PER ANSI N14.1

Unclassified

TYPE "P" CYLINDER